



Industrial Printers

## ZX1000i+ Series

**The Rise of Automation, ZX1000i+ is the Selection.**

The ZX1000i+ series is equipped with an effective and robust print mechanism, designed and built for high-volume industrial printing jobs, and suitable for any segment in the production chain. Database-enabled software increases the flexibility of data processing information. A full range of optional accessories and a wide range of standard interfaces facilitate integration into various applications.




### All-Metal Frame Structure

With a die-cast, rugged metal structure, the ZX1000i+ series is designed to maximize durability and maintain print quality while operating in harsh environments.

### User-Friendly Interface

Intuitive icons, dulcet tones, and a 3.2-inch color touch screen LCD allows the user to be in control. The innovative “C” button makes label calibration simple and efficient. The 256 MB flash memory and resident 5 TTF fonts allow for printing in different language requirements.





## Multiple Interfaces for Maximum Connectivity

The ZX1000i+ series comes standard with USB, RS232, LAN and USB Host ports. Two additional USB Host ports on the front panel, coupled with optional Wi-Fi and BT modules, provides connection flexibility in wired or wireless network environments.

## Various Output Options

High quality output in your choice of 203 dpi (8 dots/mm), 300 dpi (12 dots/mm), or 600 dpi (24 dots/mm) resolution. The ZX1000i+ series can satisfy all of your different image quality requirements.




## Supports High-volume Printing Jobs

The ZX1000i+ series not only has a 450-meter ribbon capacity and can support up to 8-inch diameter media (3" core), but is also designed for easy ribbon & media installation; perfect for bulk printing. Automatic self-adjustment for coated inside/outside ribbons gives you the flexibility to utilize different ribbons.

## Easy Maintenance

To avoid the burden of laborious and costly maintenance, The ZX1000i+ series is designed for easy disassembly and assembly of spare parts such as the print heads and platen rollers.




## Full Range Adjustable Media Sensors

Fused upper and lower media sensors offer the convenience of adjustable push & pull knobs for easy alignment.

# Specification

2023/12/14

<b>Model</b>				
		ZX1200i+	ZX1300i+	ZX1600i+
<b>Print Method</b>		Thermal Transfer / Direct Thermal		
<b>Resolution</b>		203 dpi (8 dots/mm)	300 dpi (12 dot/mm)	600 dpi (24 dots/mm)
<b>Print Speed</b>		Up to 10 IPS (254 mm/s)	Up to 7 IPS (178 mm/s)	Up to 4 IPS (102 mm/s)
<b>Print Width</b>		4.09" (104 mm, up to 108 mm)	4.09" (104 mm, up to 105.7 mm)	4.09" (104 mm, up to 105.6 mm)
<b>Print Length</b>		Min. 0.12" (3 mm)**; Max. 279.53" (7100 mm)	Min. 0.12" (3 mm)**; Max. 125.98" (3200 mm)	Min. 0.12" (3 mm)**; Max. 31.5" (800 mm)
<b>Processor</b>		32 Bit RISC CPU		
<b>Memory</b>	<b>Flash</b>	256 MB		
	<b>SDRAM</b>	256 MB		
<b>Sensor Type</b>		Adjustable reflective sensor and transmissive sensor, left aligned		
<b>Media</b>	<b>Type</b>	Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming		
	<b>Width</b>	Tear : Min. 1" (25.4 mm) – Max. 4.65" (118 mm) Cutter : Max. 4.61" (117 mm) Dispenser : Max. 4.65" (118 mm)		
	<b>Thickness</b>	Min. 0.0024" (0.06 mm) – Max. 0.01" (0.25 mm)		
	<b>Label roll diameter</b>	Max. 8" (203.2 mm)		
	<b>Core diameter</b>	Min. 1.5" (38.1 mm) – Max. 3" (76.2 mm)		
<b>Ribbon</b>	<b>Types</b>	Wax, wax/resin, resin		
	<b>Length</b>	Max. 1476' (450 m)		
	<b>Width</b>	Min. 1.18" (30 mm) – Max. 4.33" (110 mm)		
	<b>Ribbon roll diameter</b>	3" (76.2 mm)		
	<b>Core diameter</b>	1" (25.4 mm)		
<b>Printer Language</b>		EZPL, GEPL, GZPL, GDPL auto switch		
<b>Software</b>	<b>Label design tool</b>	GoLabel II (for EZPL only) (Windows)		
	<b>Management tools</b>	GoTools (Windows / Android) GoUtility (Windows)		
	<b>APP</b>	GoAPP (Android / iOS)		
<b>Driver</b>		Windows 7, Windows 8 & 8.1, Windows 10, Window11, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, 2022, MAC, Linux		
<b>SDK</b>		Win CE, .NET, Windows 7, Windows 8 & 8.1, Windows 10, Windows 11, Android, Mac, iOS		
<b>Resident Fonts</b>	<b>Bitmap fonts</b>	6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B 0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable 8 times expandable in horizontal and vertical directions		
	<b>TTF Fonts</b>	(Bold / Italic / Underline) 0°, 90°, 180°, 270° rotatable Internal TTF Fonts x5 : Traditional Chinese, Simplified Chinese, Japanese, Korean, Western languages		

<b>Download Fonts</b>	<b>Bitmap fonts</b>	0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable
	<b>Asian fonts</b>	16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese(GB2312), Japanese(S-JIS), Korean (KS-X1001) 0°, 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions
	<b>TTF fonts</b>	(Bold / Italic / Underline) 0°, 90°, 180°, 270° rotatable
<b>Barcodes</b>	<b>1-D Bar codes</b>	China Postal Code, Codabar, Code 11, Code 32, Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5, Interleaved 2-of-5 (I 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart, Random Weight and Pharmacode
	<b>2-D Bar codes</b>	Aztec code, Code 49, Codablock F, Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417, QR code, TLC 39, GS1 Composite, DotCode, Marco PDF 417
<b>Code Pages</b>		Codepage 437, 737, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869 Windows 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8 \ UTF16BE \ UTF16LE
<b>Graphics</b>		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
<b>Interfaces</b>		<ul style="list-style-type: none"> <li>• USB 2.0 (Type B)</li> <li>• Serial Port (RS232)</li> <li>• Ethernet 10/100 Mbps</li> <li>• USB Host *3(Type A). 2 ports at the front panel, 1 port at the rear panel</li> </ul>
<b>Real Time Clock</b>		Standard
<b>Control Panel</b>		<ul style="list-style-type: none"> <li>• Backlight 3.2" touch screen LCD</li> <li>• 1 Power on/off button with green colour LED backlight</li> <li>• 1 Control key: FEED/PAUSE/CANCEL with dual colour LED backlight: Ready(Green); Error(Red)</li> <li>• 1 Calibration button at rear panel</li> </ul>
<b>Power</b>		Auto Switching 100-240VAC, 50-60Hz.
<b>Environment</b>	<b>Operation temperature</b>	41°F to 104°F (5°C to 40°C)
	<b>Storage temperature</b>	-4°F to 140°F (-20°C to 60°C)
<b>Humidity</b>	<b>Operation</b>	20-85%, non-condensing.
	<b>Storage</b>	10-90%, non-condensing.
<b>Agency Approvals</b>		CE (EMC) \ FCC Class B \ CB \ cULus \ ICES-003 \ UKCA \ BSMI \ CCC \ KC***
<b>Dimension</b>	<b>Length</b>	465 mm (18.3" )
	<b>Width</b>	269 mm (10.6")
	<b>Height</b>	312 mm(12.3")
<b>Weight</b>		13.6 Kg (30 lbs), excluding consumables
<b>Options</b>		Cutter module (User Install) – Rotary cutter, Guillotine cutter, Perforation cutter, High speed cutter, Paper card cutter Parallel port adaptor module (Centronic female 36-pin)(Dealer Install) WiFi (IEEE 802.11 b/g/n) and BT (BLE 5.0) combo module (Dealer Install) External label rewinder Label Dispenser + Internal rewinder module (Dealer Install) Applicator Interface (DSUB female 15-pin) External label unwinder RFID R/W module (project option)

\* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

\*\* Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. Godex is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

\*\*\* The safety certification marks may be different depending on sales regions.

# Applications

## Applications for Labels & Barcodes

The ZX1000i+ Series is extremely versatile & can be used for most applications.



### Retail

price tags, content labels, receipts for registered mail, postage labels, etc.



### Warehouse

shelf labels, product labels, stocking management, exterior/pallet labeling, etc.




### Manufacturing

product labels, manufacturing labels, exterior/pallet labels, trade, stocking and document management, etc.

## GoDEX RIBBONS

Godex offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge

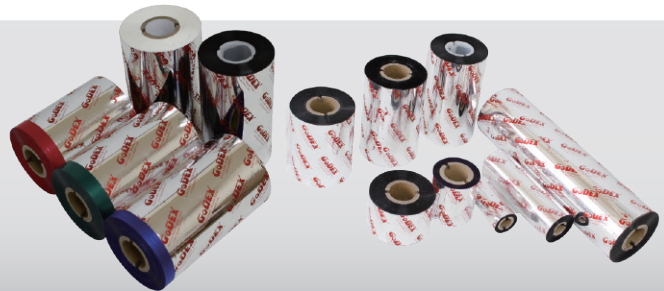

## GoDEX SOFTWARE



GoLabel II is based on a WYSIWYG (what you see is what you get) user interface, making everything so easy for users to create and print barcode labels.

GoLabel II is the first-choice in label design software, and all you need to start creating your own labels today!



Forget about installing complicated software, GoTools will show you the easiest way.



GoUtility can help users monitor GoDEX's printer status and deploy data to multiple printers through a concise user interface at the same time.