



Desktop Printers

## RT800i+ Series

### The Ultimate Printer for Your Creative Needs

The RT800i+ series has a variety of features that make it the perfect choice for any creative project. This series has a 3.2-inch color touchscreen LCD panel designed for ease of use. It leads the industry with 3 USB ports as a standard feature, allowing extensive integration with several devices like flash drives, scanners, and keyboards for extended memory and standalone operation. The RT863i+ can produce high-quality prints with 600dpi resolution and a 300m ribbon capacity.

#### Ingenious Mechanism Design

The clamshell design mechanism offers a user-friendly experience for installing consumables. A rod-less label roll holder facilitates easy loading and a smooth feeding process.



#### Intuitive 3.2" Touch Screen

A 3.2-inch color touchscreen LCD panel has been implemented to give users an intuitive and comprehensible experience.

## Support Various Printing Resolution

The RT800i+ series offers a variety of print resolutions (203dpi, 300dpi, and 600dpi) to accommodate various printing quality needs. It has a 300-meter ribbon capacity to minimize the need for frequent ribbon replacement.



## Multiple Connection Interfaces

The RT800i+ Series comes equipped with multiple interfaces such as USB, RS232, Ethernet, and 3 USB ports. The series also offers an optional WiFi and Bluetooth combo module for wireless connectivity and easy integration.

## Easy-to-Use Auto-Calibration Button

The C button's innovative design makes media calibration a simple one-touch process.




## Large Memory

This RT800i+ series is equipped with 128MB Flash Memory and 128MB SDRAM Memory, containing five TrueType fonts which support multiple languages, including Korean, Japanese, Chinese Simplified, Chinese Traditional, and Western languages, providing global support.

# Specification

2023/12/13

<b>Model</b>				
		RT823i+	RT833i+	RT863i+
<b>Print Method</b>		Thermal Transfer / Direct Thermal		
<b>Resolution</b>		203 dpi (8 dots/mm)	300 dpi (12 dot/mm)	600 dpi (24 dots/mm)
<b>Print Speed</b>		Up to 8 ips (203 mm/s)	Up to 6 ips (152 mm/s)	Up to 4 ips (102 mm/s)
<b>Print Width</b>		4.25" (108 mm)	4.16" (105.7 mm)	4.16" (105.7 mm)
<b>Print Length</b>		Min. 0.12" (3 mm)** ; Max . 279.53" (7100 mm)	Min. 0.12" (3 mm)** ; Max. 125.98" (3200 mm)	Min. 0.12" (3 mm)** ; Max . 31.5" (800 mm)
<b>Processor</b>		32 Bit RISC CPU		
<b>Memory</b>	<b>Flash</b>	128 MB		
	<b>SDRAM</b>	128 MB		
<b>Sensor Type</b>		Adjustable reflective sensor. Fixed transmissive sensor. Central aligned		
<b>Media</b>	<b>Type</b>	Continuous form, gap labels, black mark sensing, and punched hole; label length set by auto sensing or programming		
	<b>Width</b>	Min. 0.79" (20 mm) – Max. 4.65" (118 mm)		
	<b>Thickness</b>	Min. 0.0024" (0.06 mm) – Max. 0.008" (0.2 mm)		
	<b>Label roll diameter</b>	Max. 5" (127 mm)		
	<b>Core diameter</b>	1" (25.4 mm), 1.5" (38.1 mm)		
<b>Ribbon</b>	<b>Types</b>	Wax, wax/resin, resin		
	<b>Length</b>	984" (300 m)		
	<b>Width</b>	Min. 1.18" (30 mm) – Max. 4.33" (110 mm)		
	<b>Ribbon roll diameter</b>	2.67" (68 mm)		
	<b>Core diameter</b>	1" (25.4 mm)		
<b>Printer Language</b>		EZPL, GEPL, GZPL, GDPL auto switch		
<b>Software</b>	<b>Label design tool</b>	GoLabel II (for EZPL only)(Windows)		
	<b>Management tools</b>	GoTools (Windows / Android) GoUtility (Windows)		
	<b>Satin ribbon printing tool</b>	GoRibbon (Windows)		
	<b>APP</b>	GoAPP (Android / iOS)		
<b>Driver</b>		Windows 7, Windows 8 & 8.1, Windows 10, Window11, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, 2022, MAC, Linux		
<b>SDK</b>		Win CE, .NET, Windows 7, Windows 8 & 8.1, Windows 10, Windows 11, Android, Mac, iOS		
<b>Resident Fonts</b>	<b>Bitmap fonts</b>	6, 8, 10, 12, 14, 18, 24, 30, 16X26 and OCR A & B 0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable 8 times expandable in horizontal and vertical directions		
	<b>TTF Fonts</b>	(Bold / Italic / Underline) 0°, 90°, 180°, 270° rotatable Internal TTF Fonts x5 : Traditional Chinese, Simplified Chinese, Japanese, Korean, Western languages		
<b>Download Fonts</b>	<b>Bitmap fonts</b>	0°, 90°, 180°, 270° rotatable, single characters 0°, 90°, 180°, 270° rotatable		
	<b>Asian fonts</b>	16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese(GB2312), Japanese(S-JIS), Korean (KS-X1001) 0°, 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions		
	<b>TTF fonts</b>	(Bold / Italic / Underline) 0°, 90°, 180°, 270° rotatable		

<b>Barcodes</b>	<b>1-D Bar codes</b>	China Postal Code, Codabar, Code 11, Code 32, Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5, Interleaved 2-of-5 (I 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart, Random Weight and Pharmacode
	<b>2-D Bar codes</b>	Aztec code, Code 49, Codablock F, Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417, QR code, TLC 39, GS1 Composite, DotCode, Marco PDF 417
<b>Code Pages</b>		Codepage 437, 737, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869 Windows 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8 · UTF16BE · UTF16LE
<b>Graphics</b>		Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software
<b>Interfaces</b>		<ul style="list-style-type: none"> <li>• USB 2.0 (Type B)</li> <li>• Serial port (RS232)</li> <li>• Ethernet 10/100 Mbps</li> <li>• USB Host*3 (Type A)</li> </ul>
<b>Real Time Clock</b>		Option
<b>Control Panel</b>		<ul style="list-style-type: none"> <li>• Backlight 3.2" Touch Screen LCD</li> <li>• Calibration button</li> <li>• Control Key : FEED</li> <li>• Power on/standby button</li> </ul>
<b>Power</b>		Auto Switching 100-240VAC, 50-60Hz.
<b>Environment</b>	<b>Operation temperature</b>	41°F to 104°F (5°C to 40°C)
	<b>Storage temperature</b>	-4°F to 140°F (-20°C to 60°C)
<b>Humidity</b>	<b>Operation</b>	25-85%, non-condensing.
	<b>Storage</b>	10-90%, non-condensing.
<b>Agency Approvals</b>		CE (EMC) · FCC Class B · CB · cULus · ICES-003 · UKCA · BSMI · CCC · ENERGY STAR ***
<b>Dimension</b>	<b>Length</b>	280 mm (11.0" )
	<b>Width</b>	215 mm (8.46")
	<b>Height</b>	193 mm (7.6" )
<b>Weight</b>		2.7 Kg (5.9 lbs), excluding consumables
<b>Options</b>		Cutter module (Dealer Install) Label dispenser (Dealer Install) BT (Dealer Install) Wireless LAN (IEEE 802.11 b/g/n) (Dealer Install) WiFi module to WiFi (IEEE 802.11 b/g/n) and BT (BLE 5.0) combo module (Dealer Install) External label unwind stand External label rewinder Real time clock ( RTC)

\* Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

\*\* Minimum print height and maximum print speed specification compliance can be dependent on non-standard material variables such as label type, thickness, spacing, liner construction, etc. Godex is pleased to test non-standard materials for minimum print height, and maximum print speed capability.

\*\*\* The safety certification marks may be different depending on sales regions.



# Applications

## Applications for Labels & Barcodes

RT800i+ Series is extremely versatile and can be used for most applications.



### Cosmetics

Shelf labels, product serial number labels, ingredients contents labels.



### Health Care

Tube tags, pharmaceutical Labels patient identification, medical records, and laboratory specimen tags.




### Retail

Price tags, content labels, receipts for registered mails, postage labels, etc.

## GoDEX RIBBONS

Godex offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax/ Resin
- Resin
- Near Edge

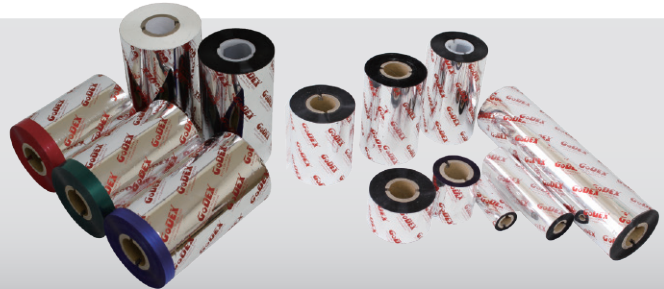

## GoDEX SOFTWARE



GoLabel II is based on a WYSIWYG (what you see is what you get) user interface, making everything so easy for users to create and print barcode labels.

GoLabel II is the first-choice in label design software, and all you need to start creating your own labels today!



Forget about installing complicated software, GoTools will show you the easiest way.



GoUtility can help users monitor GoDEX's printer status and deploy data to multiple printers through a concise user interface at the same time.